

YAMAHA TMAX 560 '22-

M O U N T I N G I N S T R U C T I O N S

REF 22606

D12 SPOILERS






PHILLIPS
SCREWDRIVER



ALLEN

Nº 3
Nº 4



ID	PIEZA/PART	DESCRIPCIÓN	DESCRIPTION	QTY	REF
1		Alerón izquierdo	Left spoiler	1	22606J/N/CM3
2		Alerón derecho	Right spoiler	1	22606J/N/CM3
3		Soporte izquierdo (L)	Left support (L)	1	SOPOR2P2-L22606
4		Soporte derecho (R)	Right support (R)	1	SOPOR2P2-R22606
5		Casquillo Ø8,5x Ø13x 3,5mm	Ø8,5x Ø13x 3,5mm Arrowhead	2	CASQUI-----775
6		Tornillo Ø5x25 DIN7505B	Ø5x25 DIN7505B Screw	2	TORNI-D7505-754
7		Tornillo Allen M5x12 DIN7991	M5x12 DIN7991 Allen screw	4	TORNI-D7991-611
8		Arandela de goma Ø4,5 x Ø11 x 2mm	Ø4,5 x Ø11 x 2mm Rubber washer	4	ARAND-EPDM--722
9		Tapón tornillo M5 DIN7991	M5 DIN7991 screw cap	4	TAPON-----92
10		Cinta adhesiva de doble cara (30x10mm)	Double-sided adhesive tape (30x10mm)	6	ADHESI-----263


YAMAHA TMAX 560 '22-

INSTRUCCIONES DE MONTAJE - MOUNTING INSTRUCTIONS - MONTAGEANLEITUNG

1


**DISASSEMBLY
DESMONTAJE**

Se muestra el montaje del lado derecho a modo de ejemplo, realizar los mismos pasos para el montaje del lado izquierdo.
The right side assembly is shown as an example, so the same steps can be performed for the left side assembly.

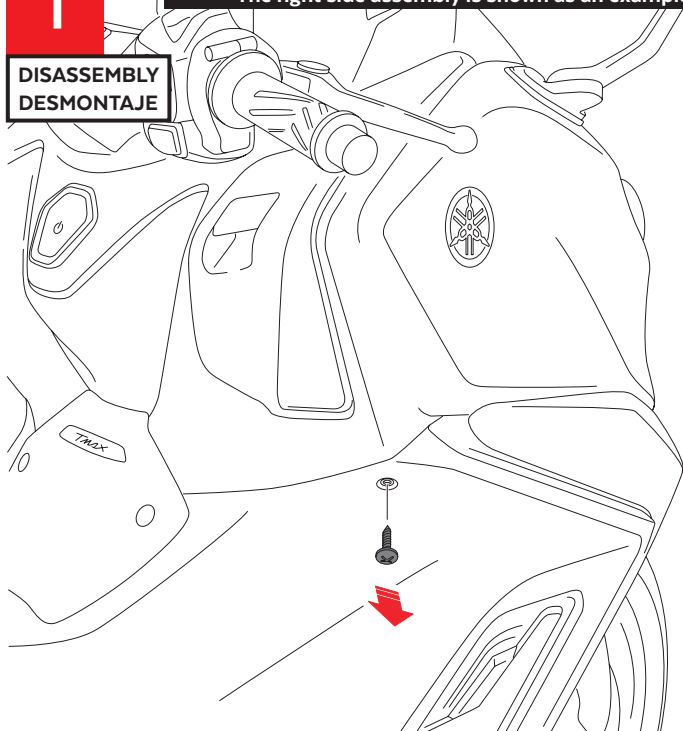

2


**PREASSEMBLY
PREMONTAJE**

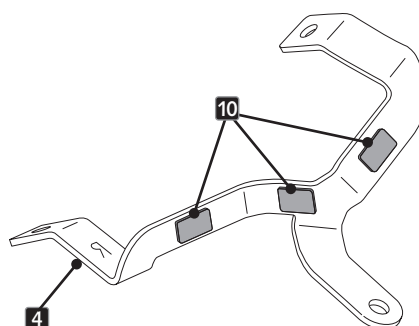

10 Extraer el papel de la cinta adhesiva de doble cara.
Extract the paper from the double-side adhesive tape.

3

**ASSEMBLY
MONTAJE**

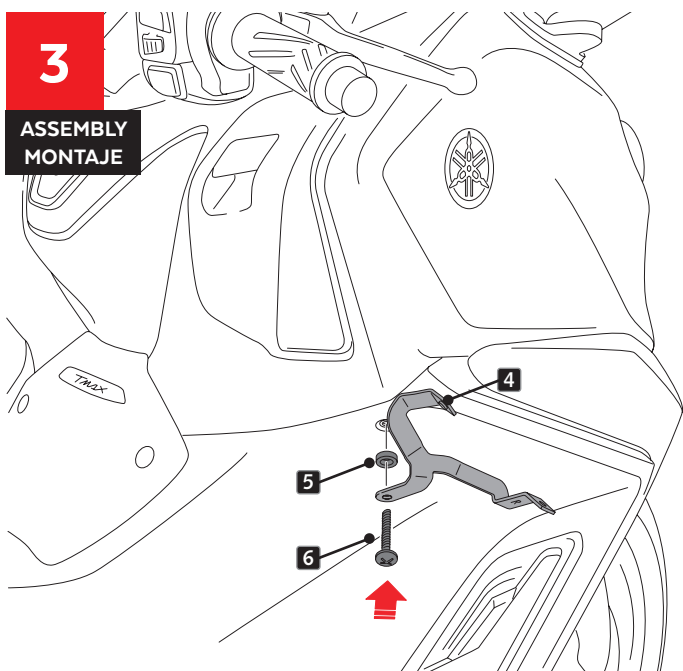

APPLY PRESSURE ON ADHESIVE ARE FOR 1 MINUTE. IDEAL TAPE APPLICATION IS ACCOMPLISHED WHEN TEMPERATURE IS BETWEEN 21°C AND 38°C AND THE BOND IS ALLOWED TO DWELL 24 HOURS.

4

**ASSEMBLY
MONTAJE**

